

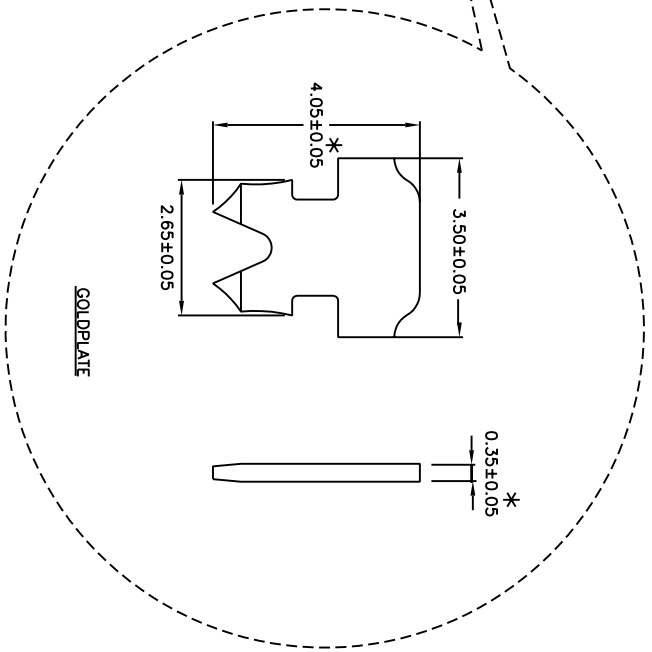



REVISIONS		
REV	DESCRIPTION	DATE
1	ADDED REMARK AND ADDED "*"	05/04/02

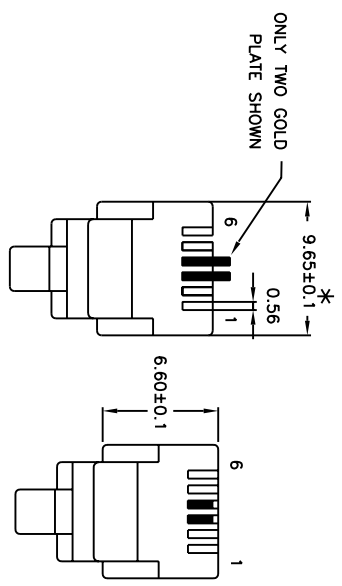

PLUG	GOLD PLATE POSITION	REMARK
6P2C	3,4	1,2,5,6, COME WITH PLASTIC STOPPER TAP
6P4C	2,3,4,5	1,6, COME WITH PLASTIC STOPPER TAP
6P6C	1,2,3,4,5,6	NA

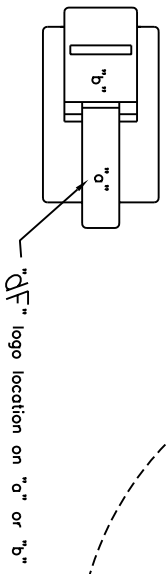

Specification :

1. Housing : Natural Polycarbonate UL-94V-0
2. Contact Material : Phosphor Bronze
3. Plating : 3u" , 6u" 15u" 30u" 50u" Gold Plating
4. Cable To Plug Tensile Strength : 8.16Kg (Min for 4&6 contacts plug)
- : 6.5Kg (Min for 2 contacts plug)

Note :

1. Plug must comply with FCC requirement Part 68 sub-part F dimension.
2. "*" Measurement Require at IQC.

DATAFIELD ELECTRIC WIRE (DONGGUAN)CO.LTD.			
PART NUMBER 6 POSITION FCC PLUG			REV 01
DRAWN BY KATHY. ZHANG	DEPARTMENT ENGINEERING(M)	APPROVALS	
DATE 2002.05.04	SCALE NOT TO SCALE		