



REVISIONS		DATE
REV	DESCRIPTION	
1	ADDED REMARK AND ADDED "*"	05/04/02

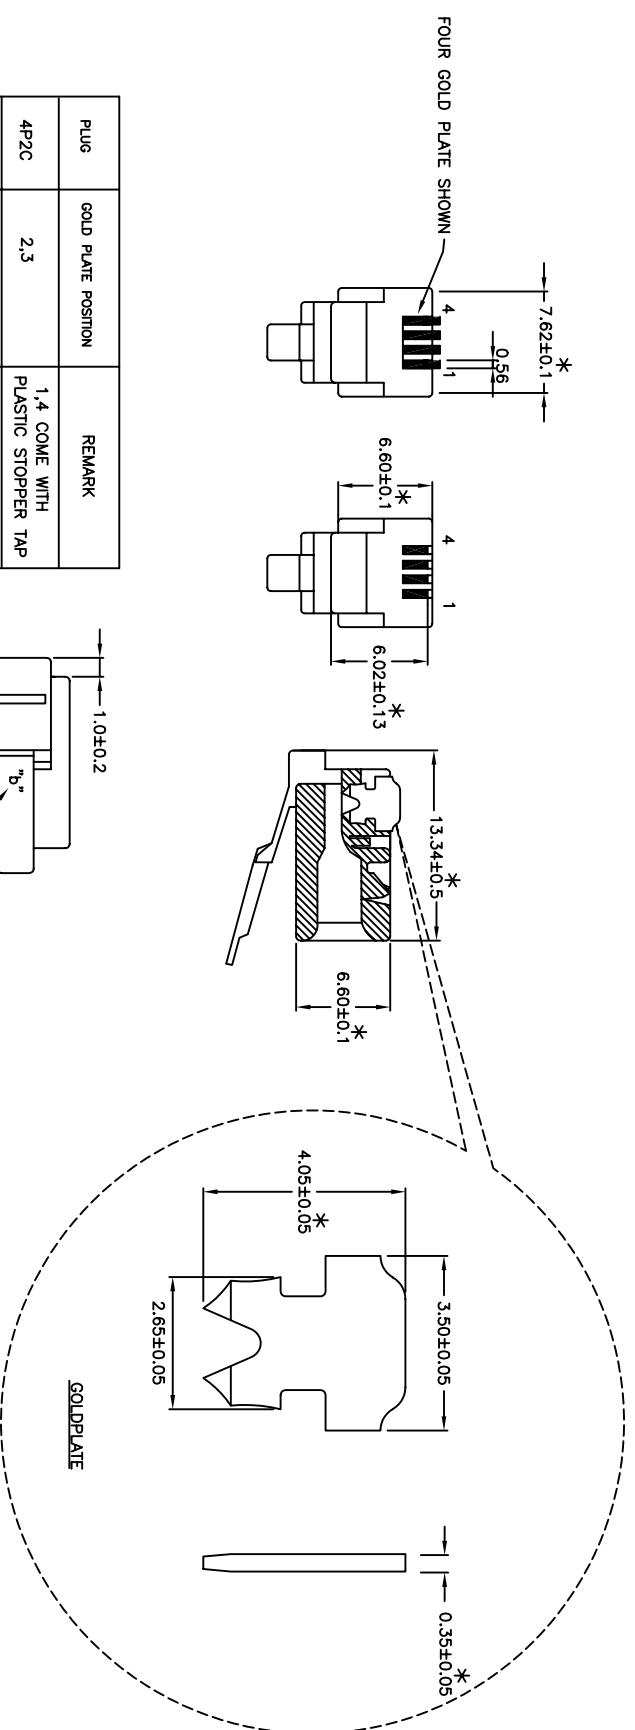

PLUG	GOLD PLATE POSITION	REMARK
4P2C	2,3	1,4 COME WITH PLASTIC STOPPER TAP
4P4C	1,2,3,4	NA

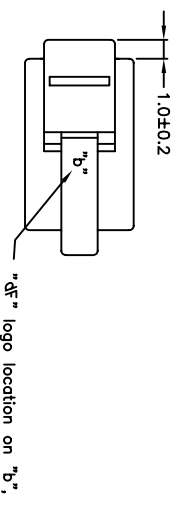

Specification :

1. Housing : Natural Polycarbonate UL-94V-0
2. Contact Material : Phosphor Bronze
3. Plating :3u", 6u" 15u" 30u" 50u" Gold Plating
4. Cable To Plug Tensile Strength : 8.16Kg (Min for 4 contacts plug)
 - : 6.5Kg (Min for 2 contacts plug)

Note:

1. Plug must comply with FCC requirement Part 68 sub-part F dimension.
2. "*" Measurement Require at IQC.

DATAFIELD ELECTRIC WIRE (DONGGUAN)CO.LTD.			REV	01
PART NUMBER			4 POSITION FCC PLUG	
DRAWN BY	DEPARTMENT	APPROVALS		
KATHY ZHANG	ENGINEERING(M)			
DATE	SCALE	SCALE		
05/04/02	NDT	TD SCALE		

