


REV	DESCRIPTION	DATE

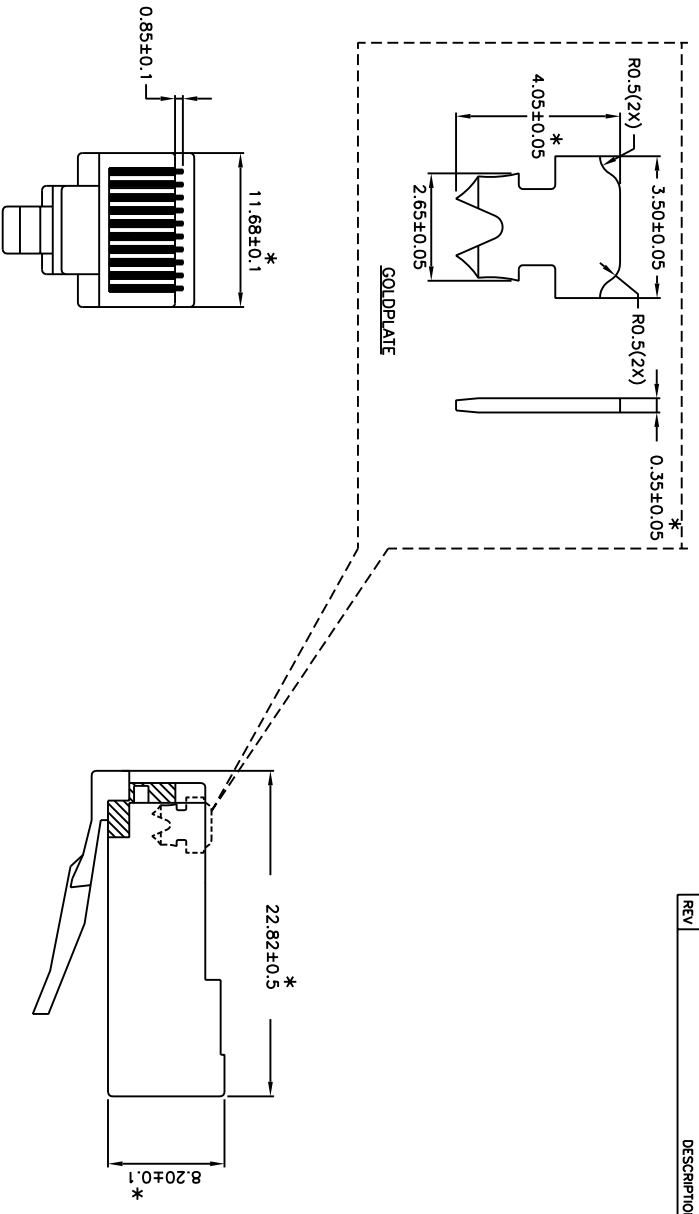

PLUG	GOLD PLATE POSITION	REMARK
BP2C	4,5	1,4,5,6,7,8 COME WITH PLASTIC STOPPER TAP
BP4C	3,4,5,6	5,6,7,8 COME WITH PLASTIC STOPPER TAP
BP8C	1,2,3,4,5,6,7,8	NA

**Specification :**

1. Housing : Natural Polycarbonate UL-94V-0
2. Contact Material : Phosphor Bronze
3. Plating :3u", 6u" 15u" 30u" 50u" Gold Plating
4. Cable To Plug Tensile Strength : 8.16Kg (Min for 4&6&8 contacts plug)  
 - : 6.5Kg (Min for 2 contacts plug)

**Note :**

1. Plug must comply with FCC requirement Part 68 sub-part F dimension.
2. "\*" Measurement Require at IQC.

TITLE		DATAFIELD ELECTRIC WIRE (DONGGUAN)CO.LTD.	
MODULAR PLUG, 8 POSITION,SHIELDED		REV	00
DRAWN BY	ENGINEERING(M)	APPROVALS	
KATHY ZHANG			
DATE	SCALE	SCALE	
2002.09.10	1:1	1:1	